

## FIRST OPERATION OF A KLYSTRON FITTED WITH A SUPERCONDUCTING MGB<sub>2</sub> SOLENOID

N. CATALAN-LASHERAS, M. BORONAT,  
G. MC MONAGLE, I. SYRATCHEV, CERN  
A. BAIG, A. CASTILLA-LOEZA, COCKCROFT  
INSTITUTE  
T. KIMURA, P. KOLDA, COMMUNICATION &  
POWER INDUSTRIES  
S. MICHIZONO , A. YAMAMOTO, KEK

# OUTLOOK



Motivation and plan



Cable and magnet manufacturing





Integration at CERN



Performance of the klystron system



Conclusions

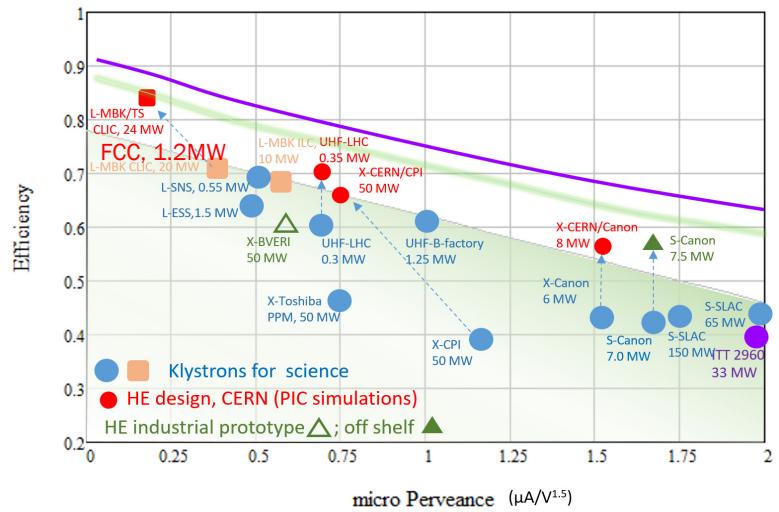


## MOTIVATION

- New projects are rated by their efficiency and sustainability performance
- Recent years have seen tremendous effort to make more efficient klystrons
- Among effects studied: E field expansion in the drift tubes; Ohmic loses; Space charge depression; Bunch saturation; Bunch congregation; Bunch stratification; Radial bunch expansion; Reflected electrons.

*J. Cai and I. Syratchev, "Design Study of X-band High Efficiency Klystrons for CLIC," 2020 IEEE 21st International Conference on Vacuum Electronics (IVEC), 2020, pp. 121-122, doi: 10.1109/IVEC45766.2020.9520585.*

# SOLENOID FOR PULSED KLYSTRONS


- Solenoidal field needed to confine the electron beam in the klystron channel.
- Electromagnet sits at constant current even for pulsed klystrons with low duty cycle
- In the x-band facility consumption of the electromagnet represents ~30% of the total power source

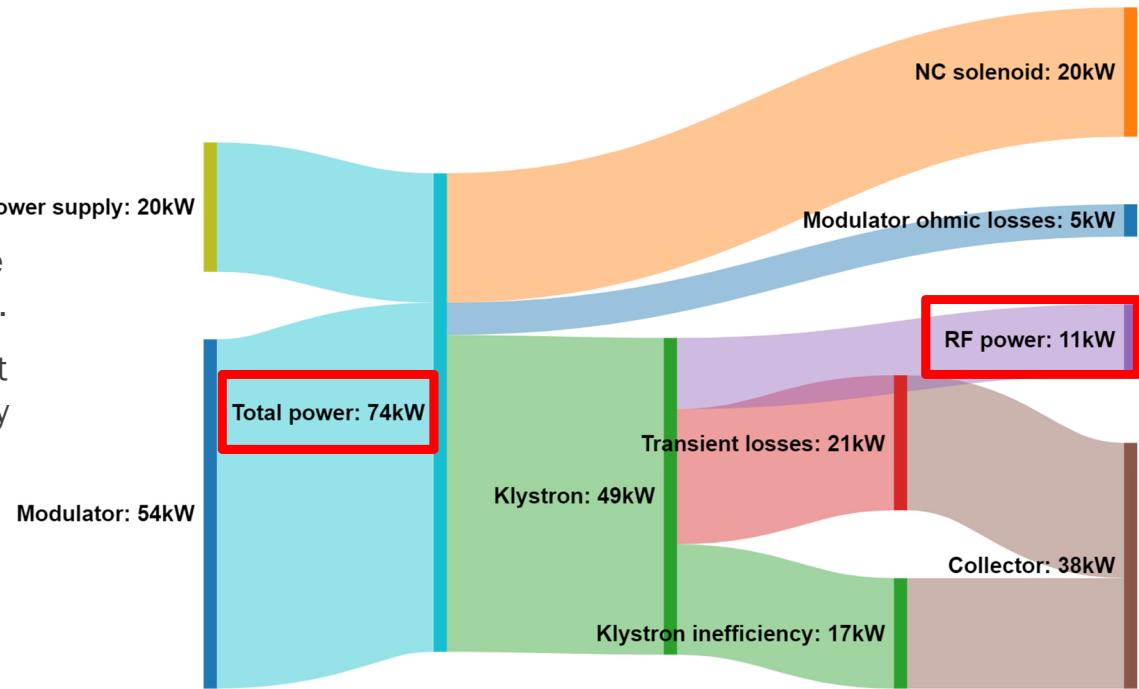

$$\text{AC power/RF efficiency} = 15.2\%$$

# SOLENOID FOR PULSED KLYSTRONS


- Solenoidal field needed to confine the electron beam in the klystron channel.
- Electromagnet sits at constant current even for pulsed klystrons with low duty cycle
- In the x-band facility consumption of the electromagnet represents ~30% of the total power source
- With a gain in klystron efficiency from 40% to 65% and an optimized pulse we can save 20 KW per RF unit
- The solenoid will then represent 37% of the power`

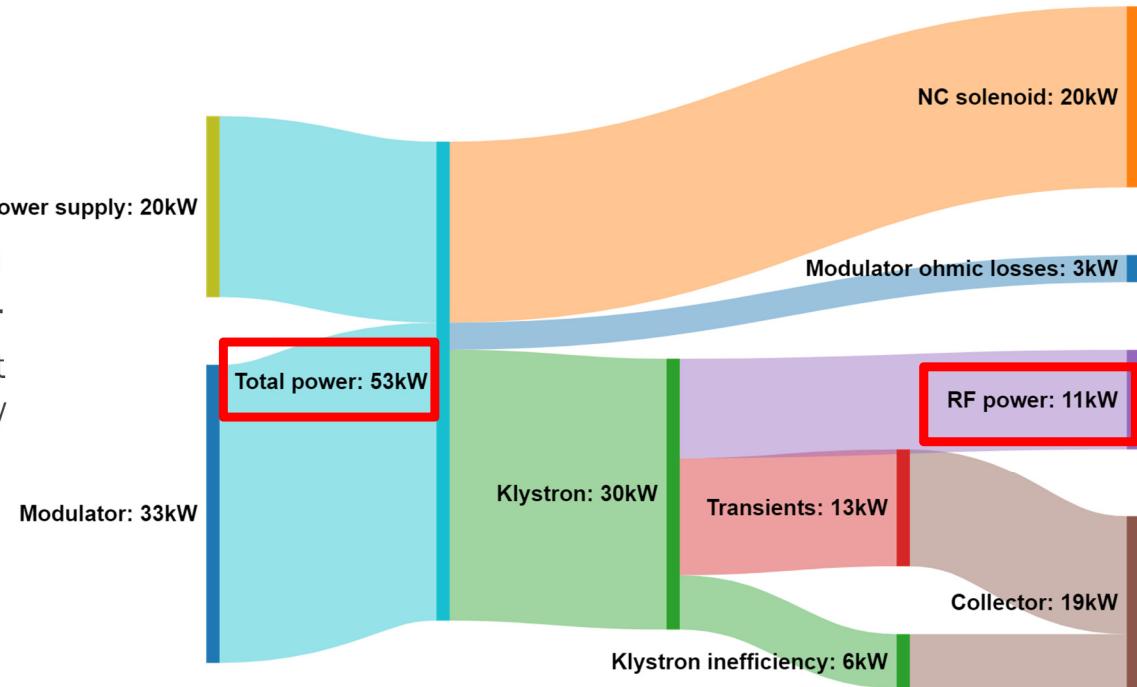

$$\text{AC power/RF efficiency} = 21.0\%$$



## SOLENOID DESIGN AND CHARACTERISTICS

- Proposal from A. Yamamoto (KEK) to build a superconducting solenoid that could be tested and operational on the CERN X-band facility
- The required magnetic field is well below 1T so we can use MgB<sub>2</sub> working below 30 K to improve the cryocooler efficiency ad minimize costs

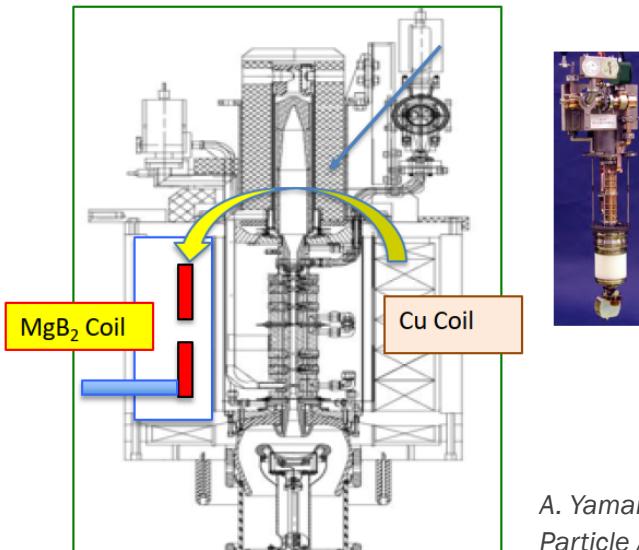


Coil technology	Unit	Cu	MgB <sub>2</sub>
Central field	T	0.6	0.8
Current	A	2x300	57
Voltage	V	35	0
Cooling method		Water	Cryo-cooler
Temp	K	300	~25
Wall plug power	kW	20	<3

A. Yamamoto et al., "Applying Superconducting Magnet Technology for High-Efficiency Klystrons in Particle Accelerator RF Systems", IEEE Transactions on Applied Superconductivity, vol. 30, no. 4, pp. 1-4, Jun. 2020. doi:10.1109/TASC.2020.2978471

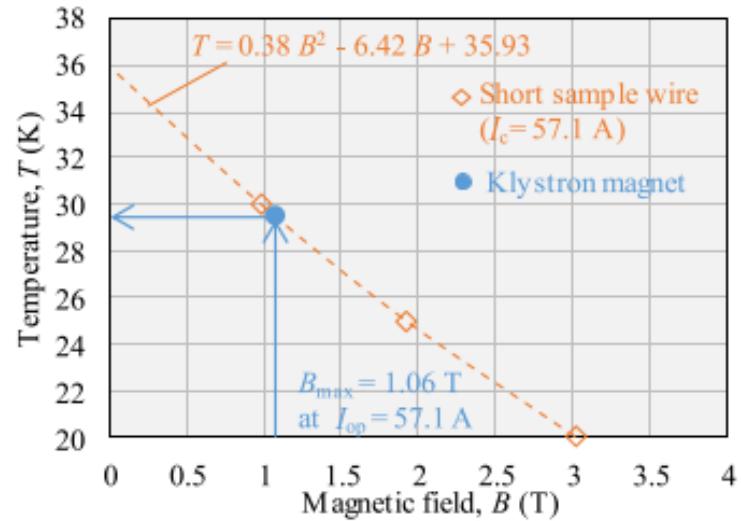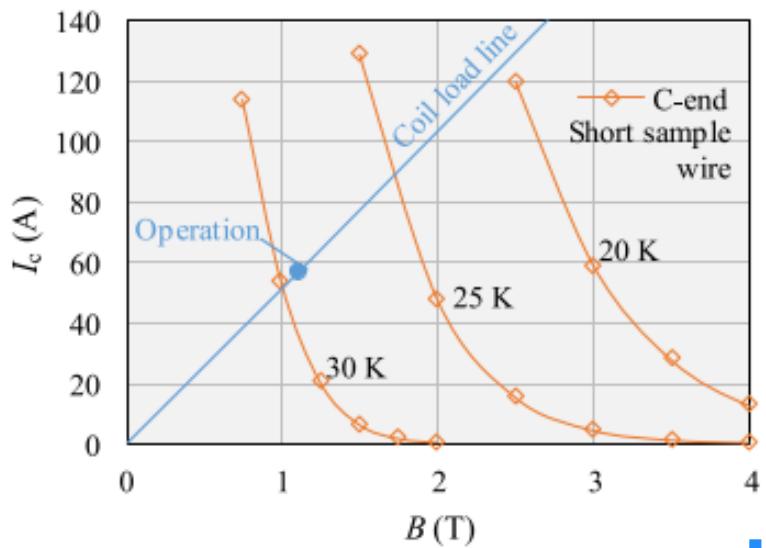


## CABLE AND CABLE TESTS

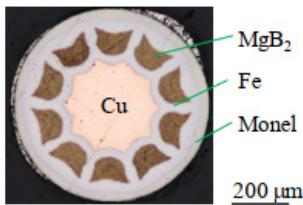



- 8km  $\text{MgB}_2$  wire manufactured by Hitachi. Based on experience for MRI magnets
- 21 samples measured. Very good homogeneity
- Critical temperature of the cable at the operational point is 29 K.
  - 57.1 A and 1.06 T field in the coil
- Works at 46% of the load-line

# MANUFACTURING OF THE SC SOLENOID IN HITACHI

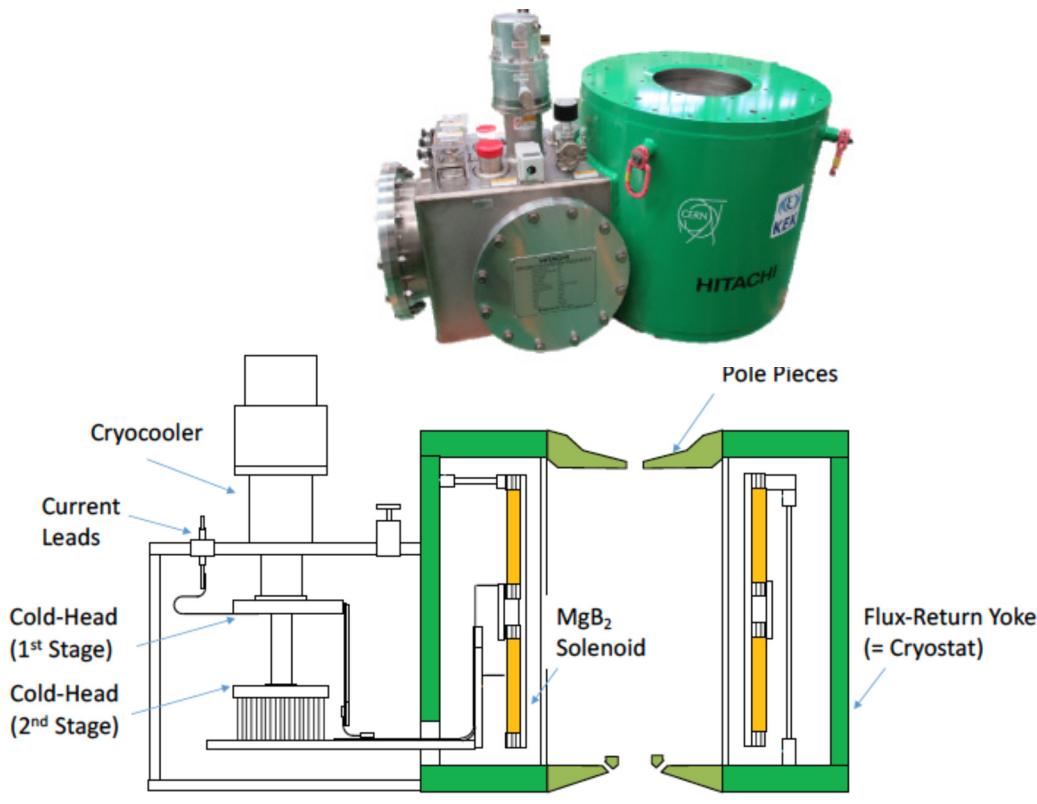

- Wind and react coils (2) in an iron cryostat that serves also as return yoke.
- HTS superconducting current leads (3)

Superconductor	MgB <sub>2</sub>	
Maximum B field	0.8	T
Current	57.1	A
Inductance	7.3	H
Max. field in coil	1.06	T
Operating temperature	<20	K
Stored energy	11.8	kJ
Weight	600	Kg
AC plug power	<3	kW

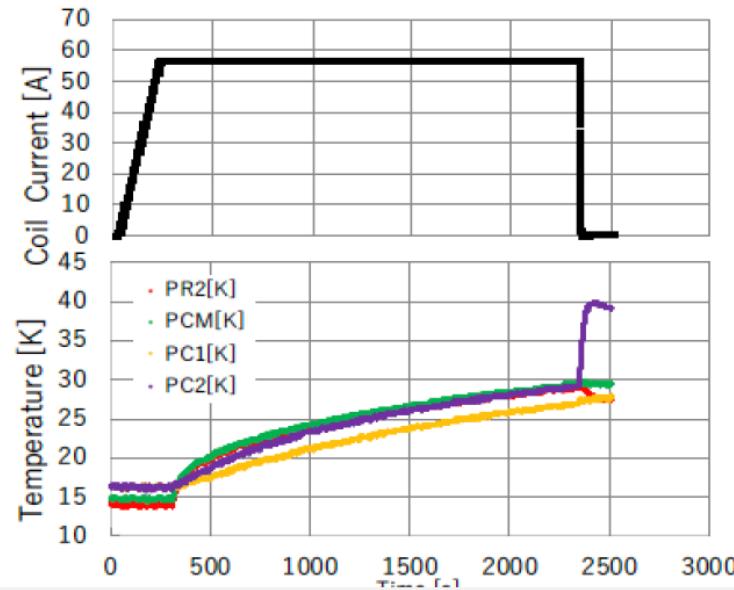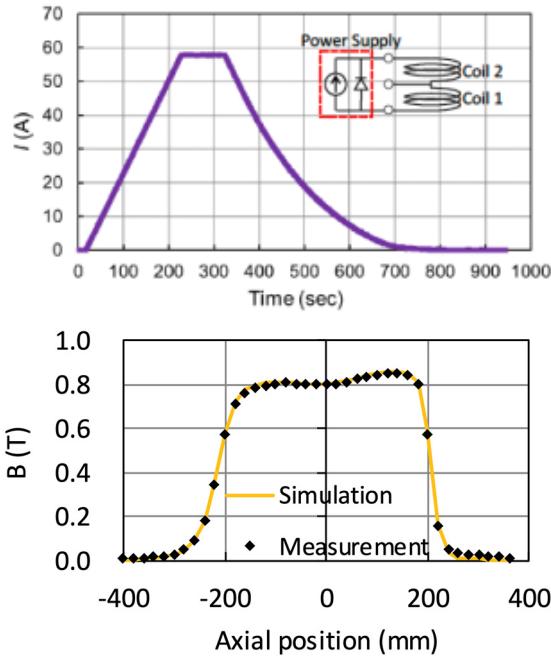

- Quench tests.
  - Self protected
- 10-hours excitation tests
- Power abort test
- Magnetic field measurements
- Very good agreement



## FIRST TESTS AT HITACHI


H. WATANABE *ET AL.*, “DEVELOPMENT OF PROTOTYPE MGB2 SUPERCONDUCTING SOLENOID MAGNET FOR HIGH-EFFICIENCY KLYSTRON APPLICATIONS”, *IEEE TRANSACTIONS ON APPLIED SUPERCONDUCTIVITY*, VOL. 30, NO. 4, PP. 1-6, JUN. 2020.

DOI:10.1109/TASC.2020.297223

# COOL-DOWN


- Two twin coils cooled by conduction.
  - Insulation vacuum
  - Helium only on the cryocooler/cold head
  - Air cooled-compressor Cryocooler plus cold head
- Available instrumentation:
  - Temperature sensors. Thermo-couples and PtCo sensors
  - Voltage taps
  - Heaters (not used at CERN)

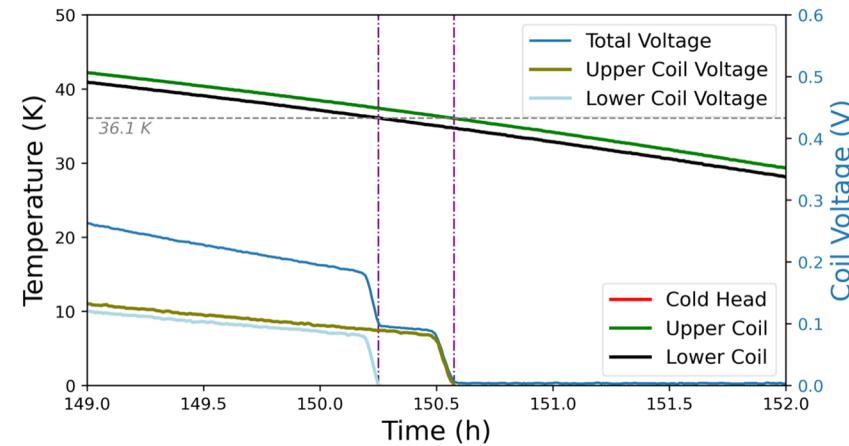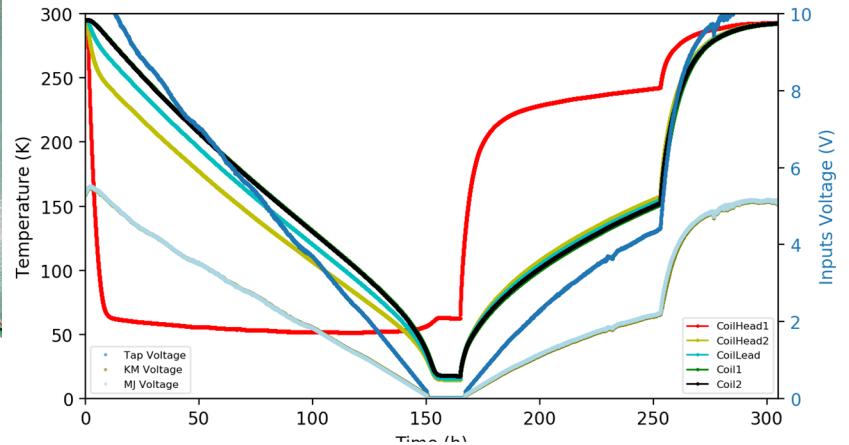

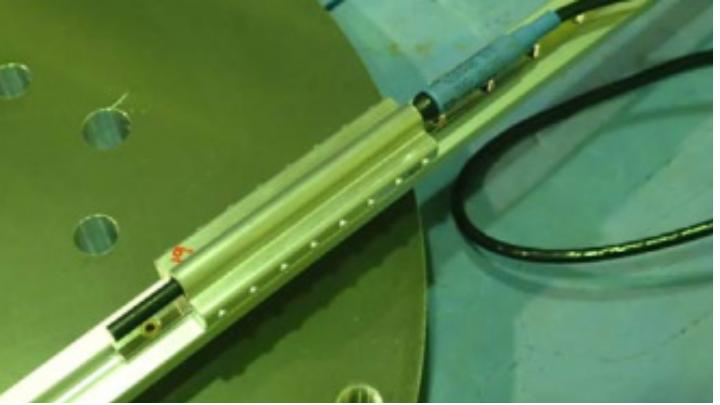


## MAGNETIC MEASUREMENTS

- Measurements done with a hall probe
- Homogeneity and reproducibility are very good!
- Small difference between magnets at the level of fringe fields
- Close to the cathode where beam rigidity is smaller. Probably important for performance

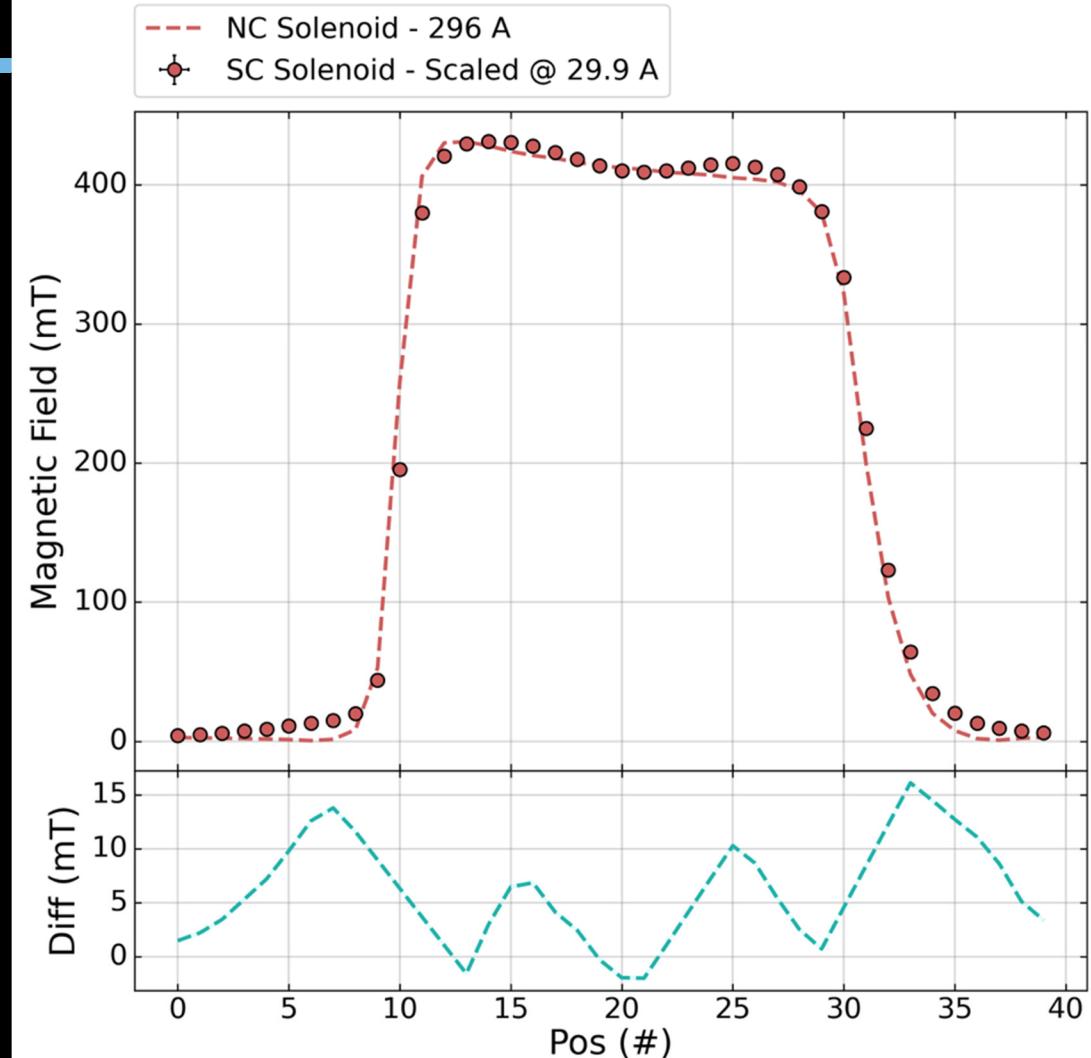


---

## INSTALLATION IN THE KLYSTRON

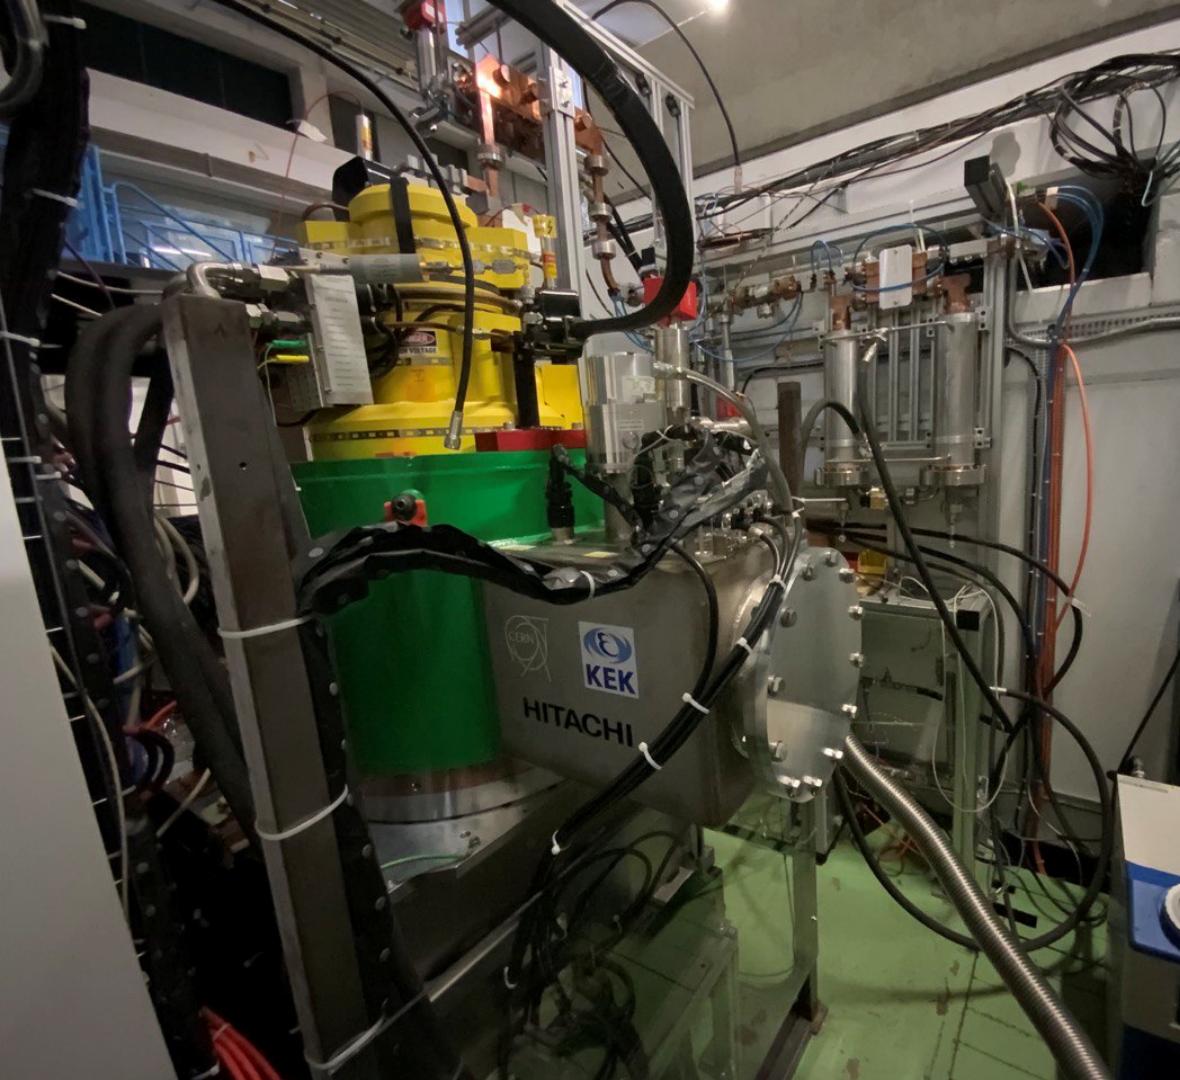

- Full compatibility with klystron and modulator interfaces
- Larger volume required on the side of modulator
- Special care needed with handling as the load is asymmetric
- Vacuum pump permanently connected (insulation vacuum)

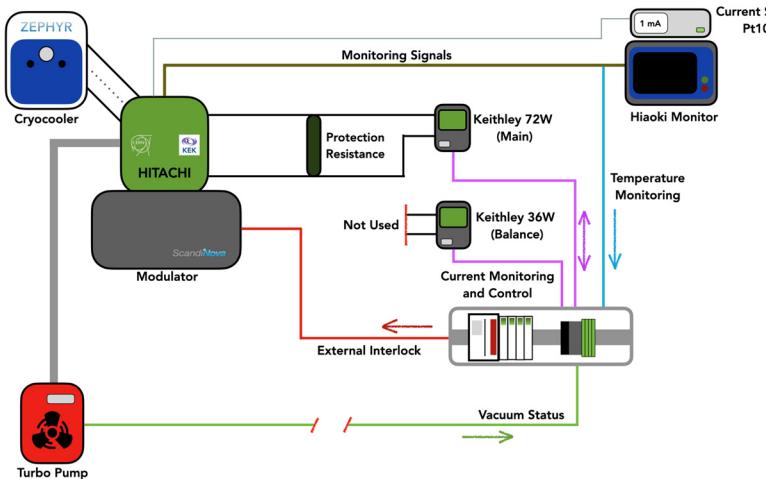

## SC Solenoid Interlocks Status: OK ERROR

### Coils Temperature

	Upper	16.28	K	Threshold	25.00	K
Lower	9.14	16.27	K	Threshold	25.00	K
<input type="button" value="Disable"/>						

### Current Sources Enabled

### Main Current Source

	Voltage	1.08	V	Min	2.00	V
Current	889849856	29.83	A	28.00	30.00	A

### Balance Current Source

	Voltage	0.33	V	Min	30.00	V
Current	362	0.41	A	30.00		A


### Vacuum Pump Status

# INTERLOCKS AND SAFETY

- From two to three feeds (**current**, **cooling**, **vacuum**)
- Interlocks on vacuum and temperature to protect the solenoid
- Interlock on solenoid current to protect the klystron


# FIRST MEASUREMENTS

- Measurements could not be done at nominal conditions as load not conditioned to full power
  - Max power ~20 MW
  - Originally optimized at CPI for nominal power @ 50 MW
- Current adjusted for central field.
- Nominal counter-coil settings for NC solenoid
- SC gain curve shows higher gain and faster saturation
- Counter-coil current adjusted for smaller beam to match original gain

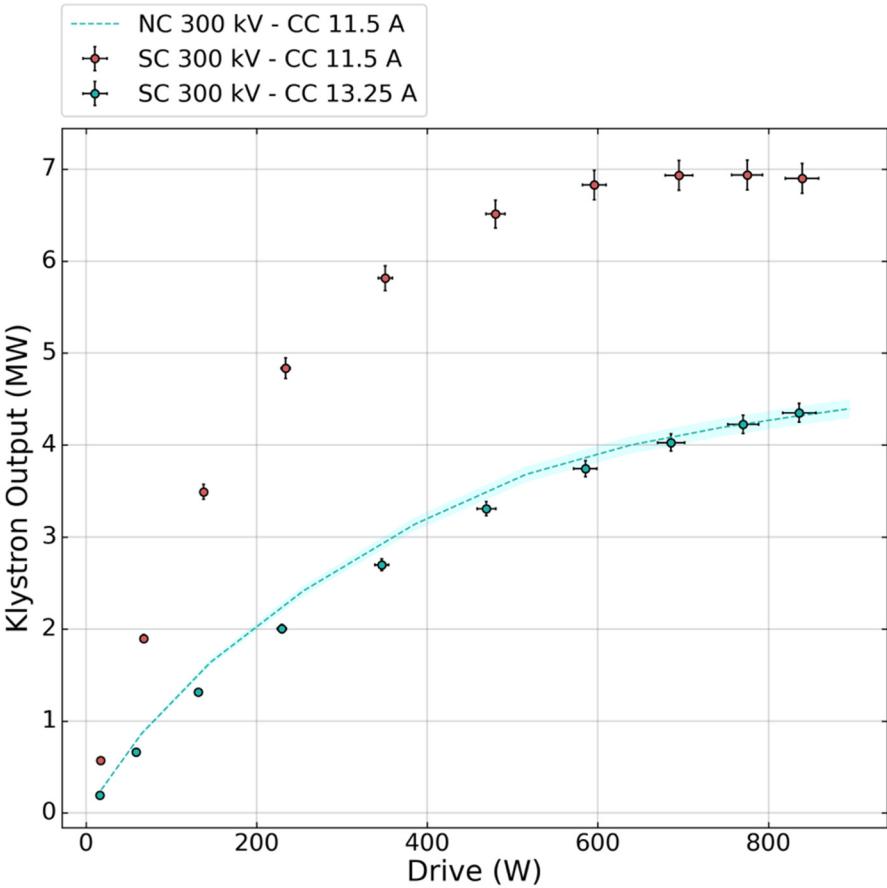


# RE-TUNING OF THE COUNTER-COIL

- Counter-coil re-tuned by an additional 20% in current to recover performance
- Same correction is valid for every klystron gain
- Counter-coil current settings are valid for all set-points

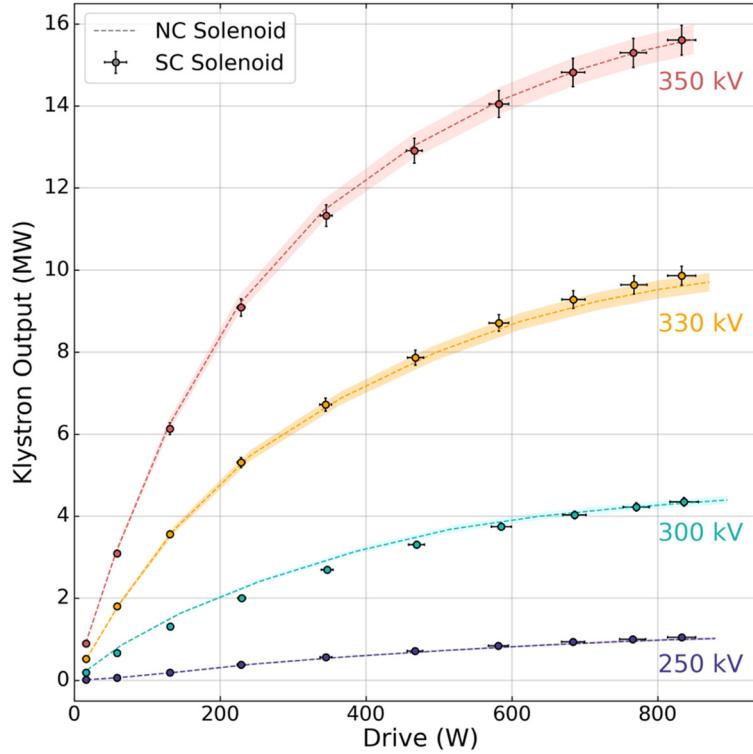

# CONCLUSIONS

- SC technology can be applied to klystron solenoid
- Energy consumption reduced by 90 % 30 ->3 kW. Further reductions still possible
- Magnetic field very similar to the conventional magnet
- No interception
- Some adjustments needed to recover performance inside the tuning range of the power supply
- Large operational margin makes it very stable and robust against failures

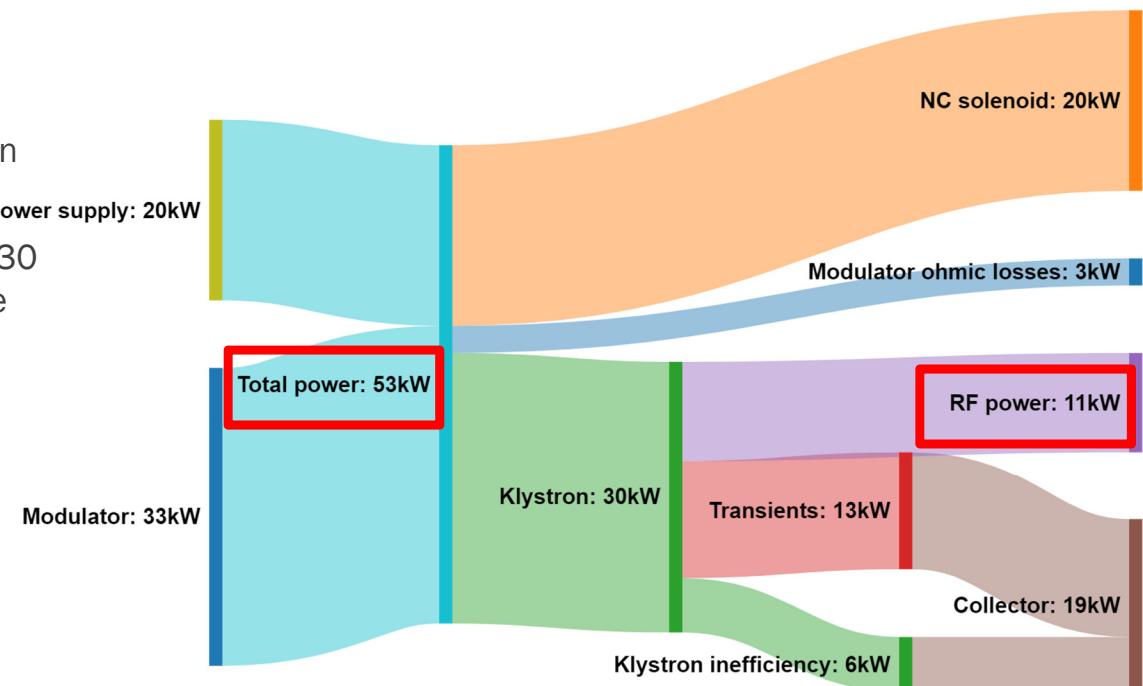


AC power/RF efficiency = 21%

# CONCLUSIONS

- SC technology can be applied to klystron solenoid
- Energy consumption reduced by 90 % 30 ->3 kW. Further reductions still possible
- Magnetic field very similar to the conventional magnet
- No interception
- Some adjustments needed to recover performance inside the tuning range of the power supply
- Large operational margin makes it very stable and robust against failures

With a high efficiency klystron , modulator AND a SC solenoid we will save >50% of the power for the same output RF power!

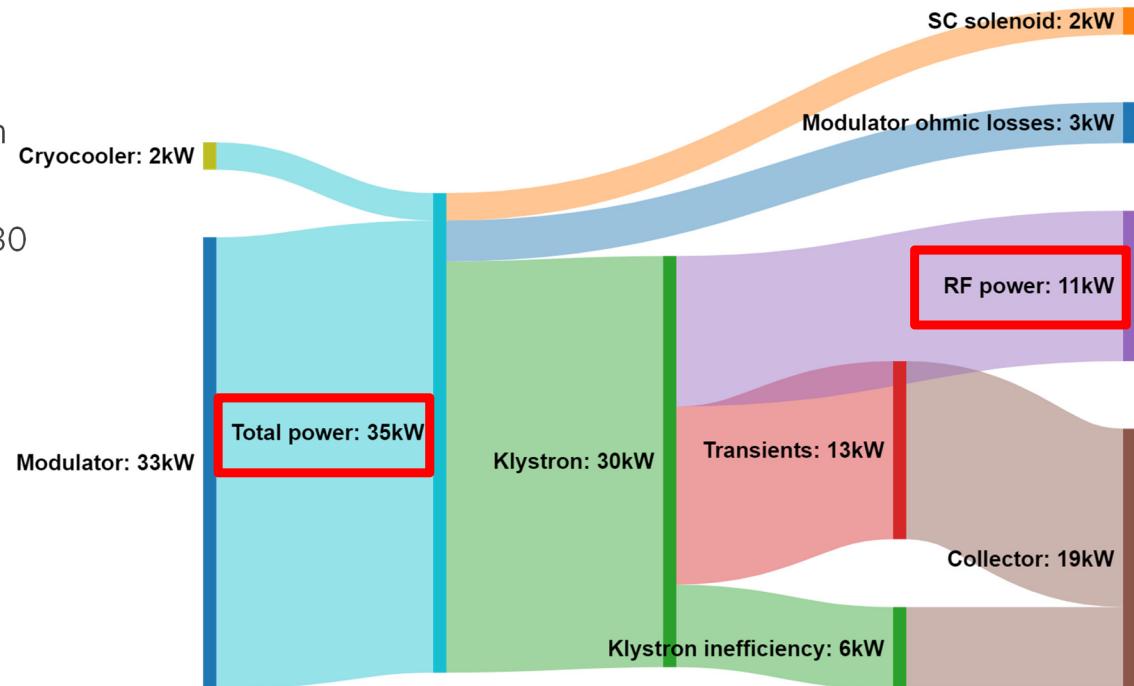

$$\text{AC power/RF efficiency} = 31.7\%$$

# ANNOUNCEMENT

- I.FAST Workshop on efficient RF sources
- Klystrons, IOTs, Solid state, tetrodes, Magnetrons, etc.

<https://indico.cern.ch/event/1138197/>

## Workshop on efficient RF sources

4–6 Jul 2022  
Chateau de Bossey  
Europe/Zurich timezone

Enter your search term

### Overview

- [Timetable](#)
- [Registration](#)
- [Payment information](#)
- [Contribution List](#)
- [My Conference](#)
  - [My Contributions](#)
- [Participant List](#)
- [Venue](#)
- [Privacy Notice](#)

Following a series of successful workshops on the initiative of the EUCARD and ARIES EU-funded programs, we would like to announce the next Workshop on Efficient RF sources to be held in Chateau de Bossey (Geneva, Switzerland) on the 4-5-6 July 2022. The workshop is part of the I.FAST initiative for "Sustainable concepts and technologies"

The workshop is aimed at displaying the recent advances on energy efficient technology for RF sources mainly used in accelerators. As in previous events, we expect a number of experts from public and private sector to participate in the meeting and the discussions around the efficiency of klystrons, IOTS, Solid state amplifiers and RF systems in general.

Organizing Committee Chairs: Nuria Catalan Lasheras (CERN), Mike Seidel (PSI)

Scientific Committee Chair: Igor Syratchev

Processing of Personal Data at CERN: OC11



**Starts** 4 Jul 2022, 09:00  
**Ends** 6 Jul 2022, 14:00  
Europe/Zurich



Igor Syratchev  
Mike Seidel  
Nuria Catalan Lasheras



Chateau de Bossey  
Chemin Chenevière 2, 1279 Bogis-Bossey, Switzerland



There are no materials yet.



**THANKS**

